


Technical Specifications Vertigo 1 - Urban 1

Model shown in the Urban 1 theme but available in any of the 3 Vertigo range themes with their associated colours.





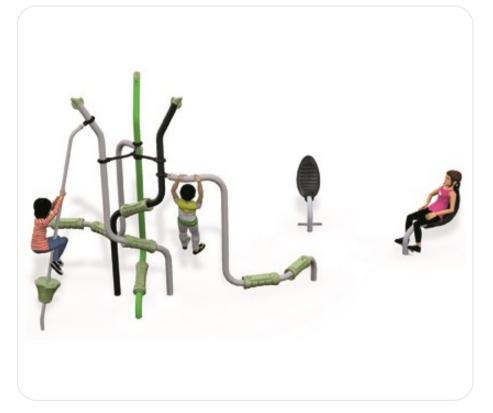





Vertigo range

VERTIGO has been specially designed to help older children and pre-teens develop a sense of their own identity and challenge themselves.

+ Ideas: the VERTIGO structures are designed for 7 to 14 year olds.

+ **Design:** a "transparent effect" for fun and flexible activities. Studied, designed and manufactured with and for pre-teens, it's hardly surprising that the VERTIGO design is such a big hit!


+ Fun: as physical challenges are now a fun part of their daily life, VERTIGO has been designed to help pre-teens surpass their limits in total safety.




| | 347.02 |
|---|--|
| Identification | |
| Catalogue | Play Equipment |
| Range | Vertigo |
| Universe/Theme | Urban I |
| Page | 123 |
| Recreational characteristics | |
| Age group | 7-14 years |
| Number of activities | 5 |
| Dimensional characteristics | |
| Equipment dimensions (LxWxH) | 5793x5585x3200 mm |
| Maximum free-fall height | 2.3 m |
| Overall dimensions of impact area | 8748×8527 mm |
| Total impact area in m² | 47 |
| Materials | |
| Frame/Structure | Galvanised, painted steel |
| Assembly | Powder coated cast aluminium |
| Other materials used | Rotation moulded thermoplastic/ stainless steel/HPL |
| Slide | No |
| Standards (tested by an independent laboratory) | |
| NF-EN 1176 Version 2008 | Yes |
| Installation | |
| Delivery | Kit |
| Foundations 0 | Concrete slab |
| Foundations -0.40 | 5 blocks |
| | |





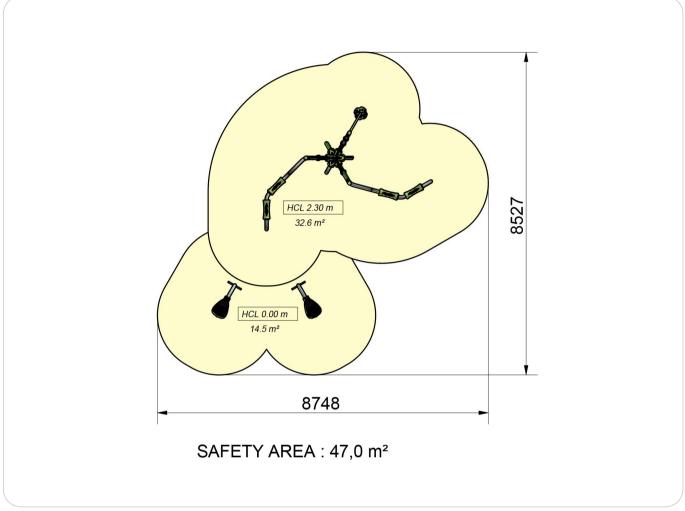

View from above and cross-sectional view (scale 1:100)

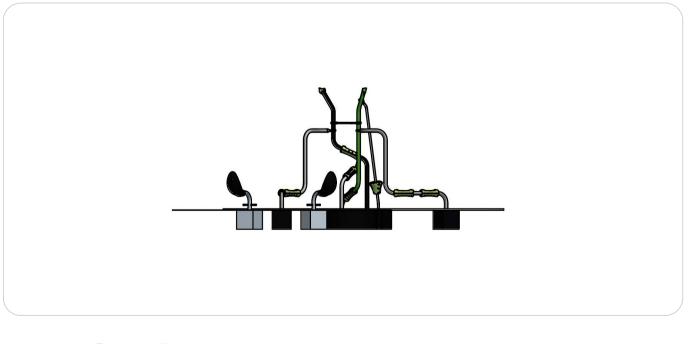





Materials data sheet and technical characteristics

vertigo



Vertigo range

STRUCTURE

The frame posts are all made from

89 mm-diameter hot-dip galvanised

Many components are manu-

factured in stainless steel, a material

renown for its durability and easy

Extremely robust

powder coated steel tubing.

maintenance.



COVERING

HPL floors and panels

Multi-coloured HPL panels specially

designed for HUSSON: high-

pressure laminate, extremely wear-

resistant (thickness 15 mm), rot-

proof, not readily flammable,

The flooring is made from anti-slip

perforated HPL to facilitate

volume-dyed solid material.

maintenance



+ THERMOPLASTIC COMPONENTS Rotation moulded thermoplastic components

The complex-shaped components are made with the rotational moulding technique. For optimum robustness, HUSSON only uses volume-dyed, extremely thick, easy maintenance, top-of-the-range HDPE (High Density Polyethylene) type material.



+ SURFACE COATING

Extremely resistant double treatment

All our steel sections feature double surface treatment:

- Treatment I: hot-dip galvanisation after manufacture (on the inside and outside of the tubes)
- Treatment 2: powder coating (powder paint, cured in an oven)



+ ASSEMBLY

Exclusive assembly system

- Clips and bearings manufactured in injected cast aluminium.
- Special anti-loose, vandalresistant stainless steel bolts (with exclusive HUSSON tool).
- Use of stainless steel and an exclusive* assembly system on all of HUSSON's ranges enables easy and cost-effective maintenance.
- Improved robustness thanks to a double-clamping system.



+ NETTING

Husson's exclusive feature

Our steel core climbing netting is coated with a substantial colour polyamide sheath.



+ SAFETY

Strict compliance with standards

The VERTIGO play equipment is designed in accordance with the new European standards EN 1176 version 2008 and Decree no. 94-699.

Compliance with standards is guaranteed by tests and certification carried out by an independent test laboratory.



+ GUARANTEE

Long-term 10 year guarantee

- Guaranteed parts: metal frame (posts and assembly parts), HPL panels, flooring.
- For HUSSON's guarantee application conditions: see HUSSON's general terms and conditions of sale (on the last pages of the current price list).

*Patented exclusive system