



### Vertigo range

VERTIGO has been specially designed to help older children and pre-teens develop a sense of their own identity and challenge themselves.

**+ Ideas:** the VERTIGO structures are designed for **7 to 14 year olds**.

**+ Design:** a "transparent effect" for fun and flexible activities. Studied, designed and manufactured with and for pre-teens, it's hardly surprising that the VERTIGO design is such a big hit!

**+ Fun:** as physical challenges are now a fun part of their daily life, VERTIGO has been designed to help pre-teens surpass their limits in total safety.



Identification	
Catalogue	Play Equipment
Range	Vertigo
Universe/Theme	Urban 2
Page	126
Recreational characteristics	
Age group	7-14 years
Number of activities	4
Dimensional characteristics	
Equipment dimensions (LxVxH)	3460x3164x3200 mm
Maximum free-fall height	2.3 m
Overall dimensions of impact area	7407x6641 mm
Total impact area in m²	33.8
Materials	
Frame/Structure	Galvanised, painted steel
Assembly	Powder coated cast aluminium
Other materials used	Rotation moulded thermoplastic/stainless steel/HPL
Slide	No
Standards (tested by an independent laboratory)	
NF-EN 1176 Version 2008	Yes
Installation	
Delivery	Kit
Foundations 0	Concrete slab
Foundations -0.40	4 blocks




Technical Specifications

# Vertigo 1 - Urban 2


7-14  
years

**Vertigo**  
JVX-0005

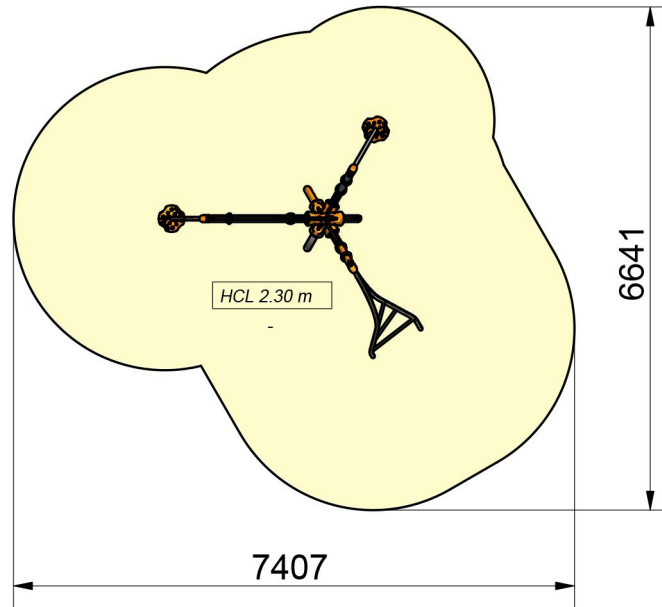

SAFETY AREA : 33,8 m<sup>2</sup>

View from above and cross-sectional view (scale 1:100)

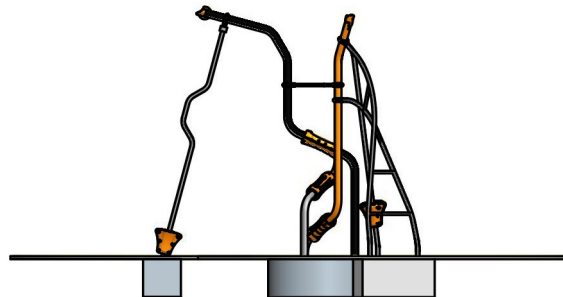

ISO 14001  
BUREAU VERITAS  
Certification





## Vertigo range

# Vertigo



### + FRAME/ STRUCTURE

#### **Extremely robust**

The frame posts are all made from 89 mm-diameter hot-dip galvanised powder coated steel tubing.

Many components are manufactured in stainless steel, a material renowned for its durability and easy maintenance.



### + FLOORS/ COVERING

#### **HPL floors and panels**

Multi-coloured HPL panels specially designed for HUSSON: high-pressure laminate, extremely wear-resistant (thickness 15 mm), rot-proof, not readily flammable, volume-dyed solid material.

The flooring is made from anti-slip perforated HPL to facilitate maintenance.



### + THERMOPLASTIC COMPONENTS

#### **Rotation moulded thermoplastic components**

The complex-shaped components are made with the rotational moulding technique. For optimum robustness, HUSSON only uses volume-dyed, extremely thick, easy maintenance, top-of-the-range HDPE (High Density Polyethylene) type material.



### + SURFACE COATING

#### **Extremely resistant double treatment**

All our steel sections feature double surface treatment:

- Treatment 1: hot-dip galvanisation after manufacture (on the inside and outside of the tubes)
- Treatment 2: powder coating (powder paint, cured in an oven)



### + ASSEMBLY

#### **Exclusive assembly system**

- Clips and bearings manufactured in injected cast aluminium.
- Special anti-loose, vandal-resistant stainless steel bolts (with exclusive HUSSON tool).
- Use of stainless steel and an exclusive\* assembly system on all of HUSSON's ranges enables easy and cost-effective maintenance.
- Improved robustness thanks to a double-clamping system.



### + NETTING

#### **Husson's exclusive feature**

Our steel core climbing netting is coated with a substantial colour polyamide sheath.



### + SAFETY

#### **Strict compliance with standards**

The VERTIGO play equipment is designed in accordance with the new European standards EN 1176 version 2008 and Decree no. 94-699.

Compliance with standards is guaranteed by tests and certification carried out by an independent test laboratory.



### + GUARANTEE

#### **Long-term 10 year guarantee**

- Guaranteed parts: metal frame (posts and assembly parts), HPL panels, flooring.
- For HUSSON's guarantee application conditions: see HUSSON's general terms and conditions of sale (on the last pages of the current price list).

\*Patented exclusive system