


# Technical Specifications

## Piccolo Playhouse


### Sand Pits

1-5  
years

**SOLO+**  
JPX-0031

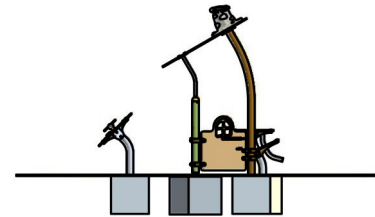

View from above and cross-sectional view (scale 1:100)

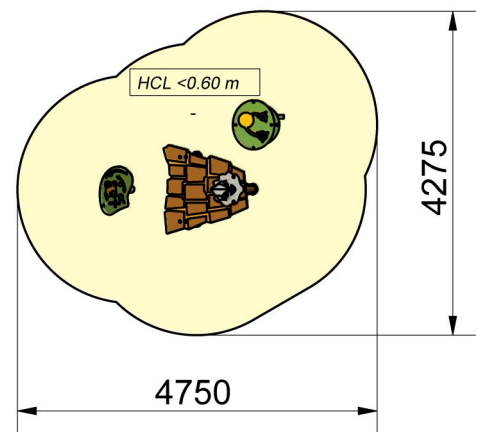

SAFETY AREA : 15,0 m<sup>2</sup>



Play equipment for  
**ALL AGES**



JPX031

## Piccolo Playhouses

**+ Ideas:** the PICCOLO playhouses have been specially designed for young children from **1 to 5 years**.

**+ Design:** available in 3 themes and associated colour combinations (Forensic, Cartoon and Aquatic).

**+ Fun:** the playhouses are fabulous equipment for encouraging social interaction.



Identification	
Catalogue	Play Equipment
Range	Solo+
Universe/Theme	Forensic
Page	189
Recreational characteristics	
Age group	1-5 years
Dimensional characteristics	
Equipment dimensions (LxVxH)	1425x1748x2250 mm
Maximum free-fall height	<0,6 m
Max. floor height	0 m
Overall dimensions of impact area	4750x4275 mm
Total impact area in m <sup>2</sup>	15
Materials	
Frame/Structure	Galvanised, painted steel
Railing/Trim	HPL
Assembly	Powder coated cast aluminium
Other materials used	Rotation moulded thermoplastic/stainless steel
Standards (tested by an independent laboratory)	
NF-EN 1176 Version 2008	Yes
Installation	
Delivery	Kit
Foundations -0.40 m	5 blocks
Foundations 0 m	Concrete slab or 5 blocks

## Solo+ range



### + FRAME/STRUCTURE

#### ***Robustness that surpasses current standards***

The frame posts are all made from 89 mm-diameter hot-dip galvanised powder coated steel pipes.



### + FLOORS/COVERING

#### ***HPL floors and panels***

Multi-coloured HPL panels specially designed for HUSSON: high-pressure laminate, extremely wear-resistant (thickness 15 mm), rot-proof, not readily flammable, volume-dyed solid material.

The flooring is made from anti-slip perforated HPL to facilitate maintenance.



### + THERMOPLASTIC COMPONENTS

#### ***Rotation moulded thermoplastic components***

The complex-shaped components are made with the rotational moulding technique. For optimum robustness, HUSSON only uses volume-dyed, extremely thick, easy maintenance, top-of-the-range HDPE (High Density Polyethylene) type material.



### + ASSEMBLY

#### ***Exclusive assembly system***

- Clips and bearings manufactured in injected cast aluminium.
- Special anti-loose, vandal-resistant stainless steel bolts (with exclusive HUSSON tool).
- Use of stainless steel and an exclusive\* assembly system on all of HUSSON's ranges enables easy and cost-effective maintenance.
- Improved robustness thanks to a double-clamping system.



### + SURFACE COATING

#### ***Extremely resistant double treatment***

All our steel sections feature double surface treatment:

- Treatment 1: hot-dip galvanisation after manufacture (on the inside and outside of the tubes)
- Treatment 2: powder coating (powder paint, cured in an oven)



### + GUARANTEE

#### ***Long-term 10 year guarantee***

- Guaranteed parts: metal frame (posts and assembly parts), HPL panels, flooring.
- For HUSSON's guarantee application conditions: see HUSSON's general terms and conditions of sale (on the last pages of the current price list).

\*Patented exclusive system