


View from above and cross-sectional view (scale 1:100)



SAFETY AREA : 11,3 m²

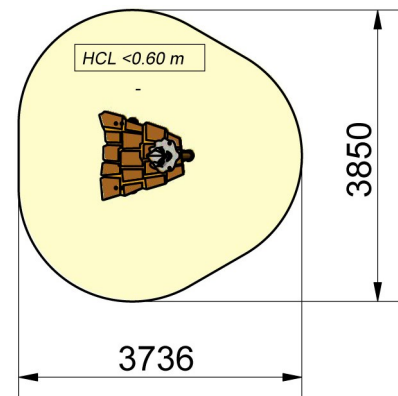

Play equipment for
ALL AGES



JPX033

Piccolo Playhouses

+ Ideas: the PICCOLO playhouses have been specially designed for young children from **1 to 5 years**.

+ Design: available in 3 themes and associated colour combinations (Forestic, Cartoon and Aquatic).

+ Fun: the playhouses are fabulous equipment for encouraging social interaction.



Identification

Catalogue	Play Equipment
Range	Solo+
Universe/Theme	Forestic
Page	189

Recreational characteristics

Age group	1-5 years
-----------	-----------

Dimensional characteristics

Equipment dimensions (LxVxH)	1245x1166x2250 mm
Maximum free-fall height	<0.6 m
Max. floor height	0 m
Overall dimensions of impact area	3736x3850 mm
Total impact area in m ²	11.3

Materials

Frame/Structure	Galvanised, painted steel
Railing/Trim	HPL
Assembly	Powder coated cast aluminium
Other materials used	Rotation moulded thermoplastic/ stainless steel

Standards (tested by an independent laboratory)

NF-EN 1176 Version 2008	Yes
-------------------------	-----

Installation

Delivery	Kit
Foundations -0.40 m	3 blocks
Foundations 0 m	Concrete slab or 3 blocks

Solo+ range



+ FRAME/STRUCTURE

Robustness that surpasses current standards

The frame posts are all made from 89 mm-diameter hot-dip galvanised powder coated steel pipes.



+ FLOORS/COVERING

HPL floors and panels

Multi-coloured HPL panels specially designed for HUSSON: high-pressure laminate, extremely wear-resistant (thickness 15 mm), rot-proof, not readily flammable, volume-dyed solid material.

The flooring is made from anti-slip perforated HPL to facilitate maintenance.



+ THERMOPLASTIC COMPONENTS

Rotation moulded thermoplastic components

The complex-shaped components are made with the rotational moulding technique. For optimum robustness, HUSSON only uses volume-dyed, extremely thick, easy maintenance, top-of-the-range HDPE (High Density Polyethylene) type material.



+ ASSEMBLY

Exclusive assembly system

- Clips and bearings manufactured in injected cast aluminium.
- Special anti-loose, vandal-resistant stainless steel bolts (with exclusive HUSSON tool).
- Use of stainless steel and an exclusive* assembly system on all of HUSSON's ranges enables easy and cost-effective maintenance.
- Improved robustness thanks to a double-clamping system.



+ SURFACE COATING

Extremely resistant double treatment

All our steel sections feature double surface treatment:

- Treatment 1: hot-dip galvanisation after manufacture (on the inside and outside of the tubes)
- Treatment 2: powder coating (powder paint, cured in an oven)



+ GUARANTEE

Long-term 10 year guarantee

- Guaranteed parts: metal frame (posts and assembly parts), HPL panels, flooring.
- For HUSSON's guarantee application conditions: see HUSSON's general terms and conditions of sale (on the last pages of the current price list).

*Patented exclusive system